


**ecopod** combination unit

Cylinder Reference Number	Capacity Cold / Hot	Type	Overall diameter	Overall height	Cold tank height	Hot tank height
EPC 227/120	227 / 120	Indirect ESB Type	500 530	2170 2170	1300 1300	870 870
EPC 227/144	227 / 144	Indirect ESB Type	550 580	2140 2140	1300 1300	840 840
EPC 317/120	317 / 120	Indirect ESB Type	583 613	2180 2180	1560 1560	620 620
EPC 317/144	317 / 144	Indirect ESB Type	650 680	1850 1850	1260 1260	590 590
EPC 317/180	317 / 180	Indirect ESB Type	650 680	1990 1990	1260 1260	730 730
EPC 314/120	314 / 120	Indirect ESB Type	583 613	2280 2280	1660 1660	620 620


**ecopod** combination unit deluxe

Cylinder Reference Number	Cylinder Size H x D	Overall Height mm	Overall Width mm	Overall Depth mm	Capacity (Litres) Indirect	Direct
EPCD 117/120	900 x 450	2050	600	600	117	120
EPCD 140/144	1050 x 450	2050	600	600	140	144
EPCD 162/166	975 x 500	2050	600	600	162	166
EPCD 205/210	1050 x 500	2050	600	600	205	210

EcoPod Combination Unit

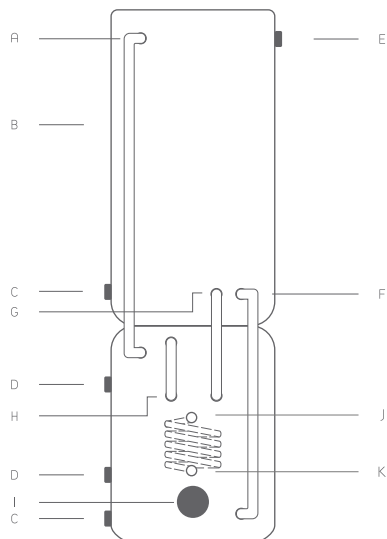

EcoPod Combination Unit Deluxe

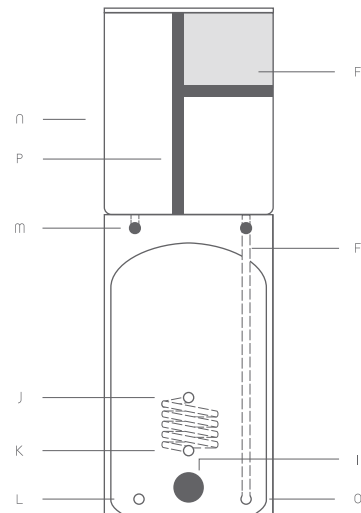

- A - 3/4 Inch copper expansion pipe
- B - 25 mm Approved polyurethane insulation
- C - 1/2 Inch drain cock
- D - 1 Inch coil connection

- E - Overflow warning pipe connects here
- F - Cold Feed to copper hot water cylinder
- G - Cold water supply from storage tank to pump

- H - Hot water supply from cylinder to pump
- I - Immersion heater
- J - Indirect flow
- K - Indirect return
- L - Drain cock

- M - Expansion tank
- N - Cold water storage tank
- O - Steel Frame
- P - Cold mains supply